
Backdraft Damper

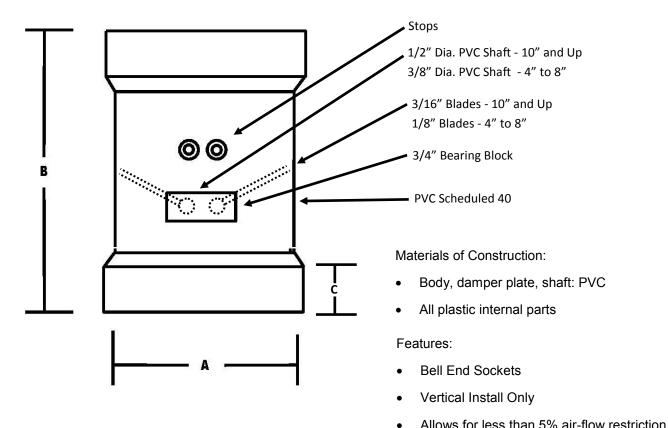

| • | Allows 10 | iless | man | 5% | all-llow | restriction |
|---|-----------|-------|-----|----|----------|-------------|
| | | | | | | |

| • | Offers | an | annr | oxima | ite | 95% | seal |
|---|--------|----|------|-------|-----|-------|------|
| • | Oncis | an | αρρι | | | JJ /U | Juai |

| Dimensional Data in Inches to fit over Scheduled 40 PVC | | | | | | |
|---|------|-------|-------|-------|-------|--|
| Size | BD4 | BD6 | BD8 | BD10 | BD12 | |
| A(I.D.) | 4.5 | 6.625 | 8.625 | 10.75 | 12.75 | |
| В | 8.5 | 9.5 | 10.5 | 11.75 | 12.75 | |
| С | 2.25 | 2.25 | 2.5 | 2.5 | 2.75 | |

fanAm

TEL. (941) 955-9788

TOLL FREE (800) 838-4074

FAX. (941) 955-9733

info@fanam.com

www.fanam.com

| | iet | ŀri | hı | ıtΔ | Ы | Bv | |
|---|-----|-----|-----|-----|---|----|--|
| L | ısı | Ш | IJι | ıιe | u | DV | |